



OPTIONS:



KITB-50200 Foam spray marker



KIT-70405 Lights + plates V-20 kit



KITB-00400 LED beams



KITB-00410 "Load Sensing" (optimizes tractor oil consumption)



KITB-00420 Automatic leveling Sonar controlled (2 sensors)

Technical specifications:

- Booms inclined 6º in transport position
- / Reinforced steel structure with aluminum tips
- Tips and first section open vertically, the rest of the sections horizontally
- √ Oven polymerized paint
- Exclusive hydraulic incline corrector which does not cancel the auto leveling mechanism
- √ Hydraulic lock
- √ Variable geometry
- √ Mechanical incline corrector
- √ Elastic boom tip forward and backward protection
- √ 7 folding sections (18Mtrs)
- √ 9 folding sections (21-24Mtrs)
- √ 50cm spacing Trijet nozzle holders
- √ 5, 7, 9 water sections (depending on version)
- √ Integral mechanical protection
- Adjustable rear bumper
- √ Lights and plate support
- √ Stainless steel nozzle holder pipes
- Electric control box for hydraulic functions



CODE	METRES	NOZZLE HOLDERS	SECTIONS
BH-183350	18	TRIJET	5
BH-183370	18	TRIJET	7
BH-183390	18	TRIJET	9
BH-213350	21	TRIJET	5
BH-213370	21	TRIJET	7
BH-213390	21	TRIJET	9
BH-243350	24	TRIJET	5
BH-243370	24	TRIJET	7
BH-243390	24	TRIJET	9










7/9 sections

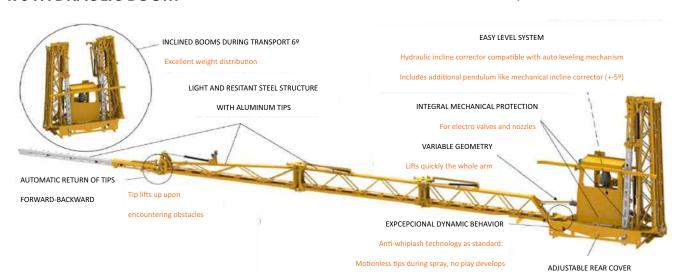


Fittings and attachments for lights and plate

DIMENSIONS AND WEIGHTS

	Nº tramos	Ĺ	ı w	н	Kg
18 mts	7	910	2400	2790	700
21 mts	9	1050	2400	2790*	830
24 mts	9	1050	2400	2990	850

In 2990 option

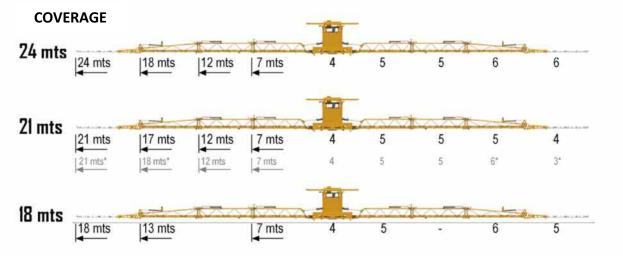

OPTIONS

LED boom work lights T3 filters

Hydraulic functions joystick Automatic nozzle switching

Sonar height control and variable geometry Lights and plate kit V-20

Load sensing technology

